




Toyana Bearing Manufacturing of Canada

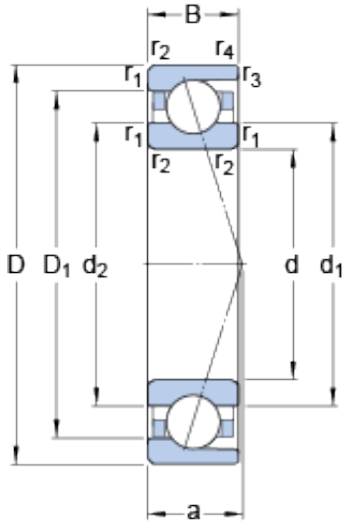

7016 CD/P4A Bearing 2D drawings and 3D CAD models

80 mm x 125 mm x 22 mm SKF 7016 CD/P4A
angular contact ball bearings

Bearing No. 7016 CD/P4A

Size	125x80x22 mm
Bore Diameter	125 mm
Outer Diameter	80 mm
Width	22 mm
d	80 mm
D	125 mm
B	22 mm
d ₁	93.9 mm
d ₂	93.9 mm
D ₁	111.1 mm
r _{1,2} - min.	1.1 mm
r _{3,4} - min.	0.6 mm
a	24.8 mm
d _a - min.	86 mm
d _b - min.	86 mm
D _a - max.	119 mm
D _b - max.	121 mm
r _a - max.	1 mm
r _b - max.	0.6 mm
d _n	96.9 mm
Basic dynamic load rating - C	65 kN
Basic static load rating - C ₀	61 kN
Fatigue load limit - P _u	2.6 kN
Limiting speed for grease	10000 r/min



Toyana Bearing Manufacturing of Canada

Lubrication	
Limiting speed for oil lubrication	17000 mm/min
Ball - D_w	14.288 mm
Ball - z	20
G_{ref}	11.1 cm ³
Calculation factor - f_0	15.5
Preload class A - G_A	240 N
Preload class B - G_B	480 N
Preload class C - G_C	960 N
Preload class D - G_D	1920 N
Calculation factor - f	1.13
Calculation factor - f	1
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.02
Calculation factor - f_{2C}	1.05
Calculation factor - f_{2D}	1.09
Calculation factor - f_{HC}	1
Preload class A	92 N/micron
Preload class B	125 N/micron
Preload class C	175 N/micron
Preload class D	254 N/micron
Category	Precision Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.89
EAN	7316571098043
Product Group	B04270
Enclosure	Open



Toyana Bearing Manufacturing of Canada

Precision Class	ABEC 7 ISO P4
Material - Ball	Steel
Number of Bearings	1 (Single)
Contact Angle	15 Degree
Preload	None
Raceway Style	1 Rib Outer Ring
Cage Material	Phenolic
Rolling Element	Ball Bearing
Flush Ground	No
Inch - Metric	Metric
Other Features	Single Row Angular Contact High Precision
Long Description	80MM Bore; 125MM Outside Diameter; 22MM Width; Open Enclosure; ABEC 7 ISO P4 Precision; Steel Ball Material; 1 (Single) Bearings; 15 Degree Contact Angle; Phenolic Cage Material; 1 Rib Outer Ring Ra
Category	Precision Ball Bearings
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact Ball
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	7016 CD/P4A
Weight / LBS	1.949
Width	0.866 Inch 22 Millimeter
Bore	3.15 Inch 80 Millimeter
Outside Diameter	4.921 Inch 125 Millimeter
d ₁	93.9 mm
d ₂	93.9 mm
D ₁	111.1 mm



Toyana Bearing Manufacturing of Canada

$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
d_a min.	86 mm
d_b min.	86 mm
D_a max.	119 mm
D_b max.	121 mm
r_a max.	1 mm
r_b max.	0.6 mm
d_n	96.9 mm
Basic dynamic load rating C	65 kN
Basic static load rating C_0	61 kN
Fatigue load limit P_u	2.55 kN
Attainable speed for grease lubrication	10000 r/min
Attainable speed for oil-air lubrication	17000 r/min
Ball diameter D_w	14.288 mm
Number of balls z	20
Reference grease quantity G_{ref}	11.1 cm ³
Preload class A G_A	240 N
Static axial stiffness, preload class A	92 N/ μ m
Preload class B G_B	480 N
Static axial stiffness, preload class B	125 N/ μ m
Preload class C G_C	960 N
Static axial stiffness, preload class C	175 N/ μ m
Preload class D G_D	1920 N
Static axial stiffness, preload class D	254 N/ μ m
Calculation factor f	1.13
Calculation factor f_1	1



Toyana Bearing Manufacturing of Canada

Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.02
Calculation factor f_{2C}	1.05
Calculation factor f_{2D}	1.09
Calculation factor f_{HC}	1
Calculation factor f_0	15.5
Mass bearing	0.85 kg